



# Giotto

- Range of barriers for semi-intensive use, able to manage clear drive throughs up to 6 m. Available in the 24V versions, they have a wide range of accessories that make them ideal in any context
- Programming scenarios: the LIBRA CG/CGS control units enable extremely fast and precise installations thanks to installation scenario programming. In fact, with just a few choices made on the display it is possible to program the control unit completely, saving time and ensuring the best results
- Control unit in top position: the control unit located at the top of the barrier and protected by a solid aluminium housing enables connection, programming and maintenance operations to be performed with maximum ease and convenience.
- Power supply 24V: The 24V power supply of the gearmotor allows the use of the emergency power kit (GTO BAT battery kit) as well as the ECOSOL solar power system

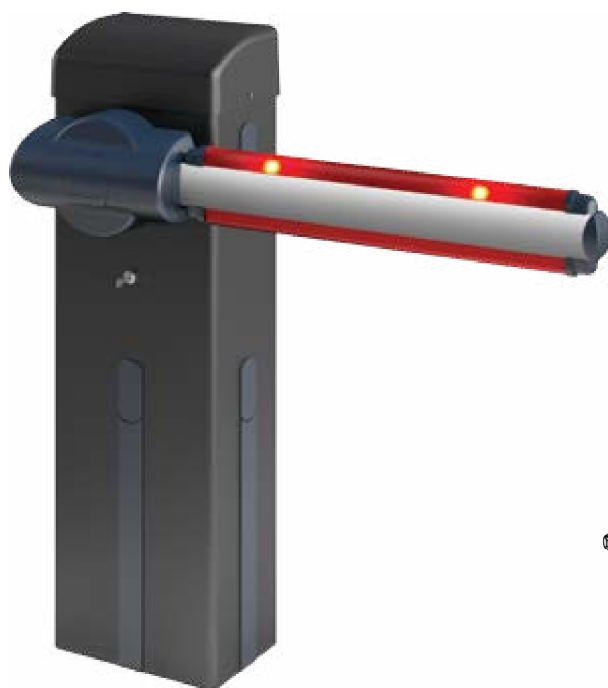

## TECHNICAL CHARACTERISTICS

	GIOTTO 30 BT	GIOTTO 30S BT	GIOTTO 60 BT	GIOTTO 60S BT
Useful passage	3m	3m	6m	6m
Control unit	Libra C G	Libra C GS	Libra C G	Libra C GS
Motor power supply	24V			
Opening or closing time	4sec	2.5sec	5sec	4sec
Type of limit switch	electronic open/close			
Slowdown	adjustable			
Lock	mechanical			
Release	personal release key			
Frequency of use	intensive			
Ambient conditions	from -10/(-40 with thermo activation) <sup>o</sup> C to 55 <sup>o</sup> C			
Protection rating	ip54			